

SPECIFICATION:


CONTACT RATING: Refer to "Contact Material Options" for more info.
 ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
 CONTACT RESISTANCE: 20mΩ max. initial @2-4 VDC
 100mA for both silver and gold plated contacts.
 INSULATION RESISTANCE: 1000MΩ min.
 DIELECTRIC STRENGTH: 1500V RMS @ sea level.
 OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS:

CASE: Diallyl phthalate(DAP)(UL 94V-0).
 PLUNGER: Polybutylene terephthalate (PBT) or Nylon 6/6.
 BUSHING: Brass, nickel plated.
 SWITCH SUPPORT: Brass, tin plated.
 HOUSING: Stainless steel.
 TERMINAL SEAL: Epoxy.

If your preferred product configuration is not shown, please contact our sales representative for custom design.

HOW TO ORDER SYSTEM

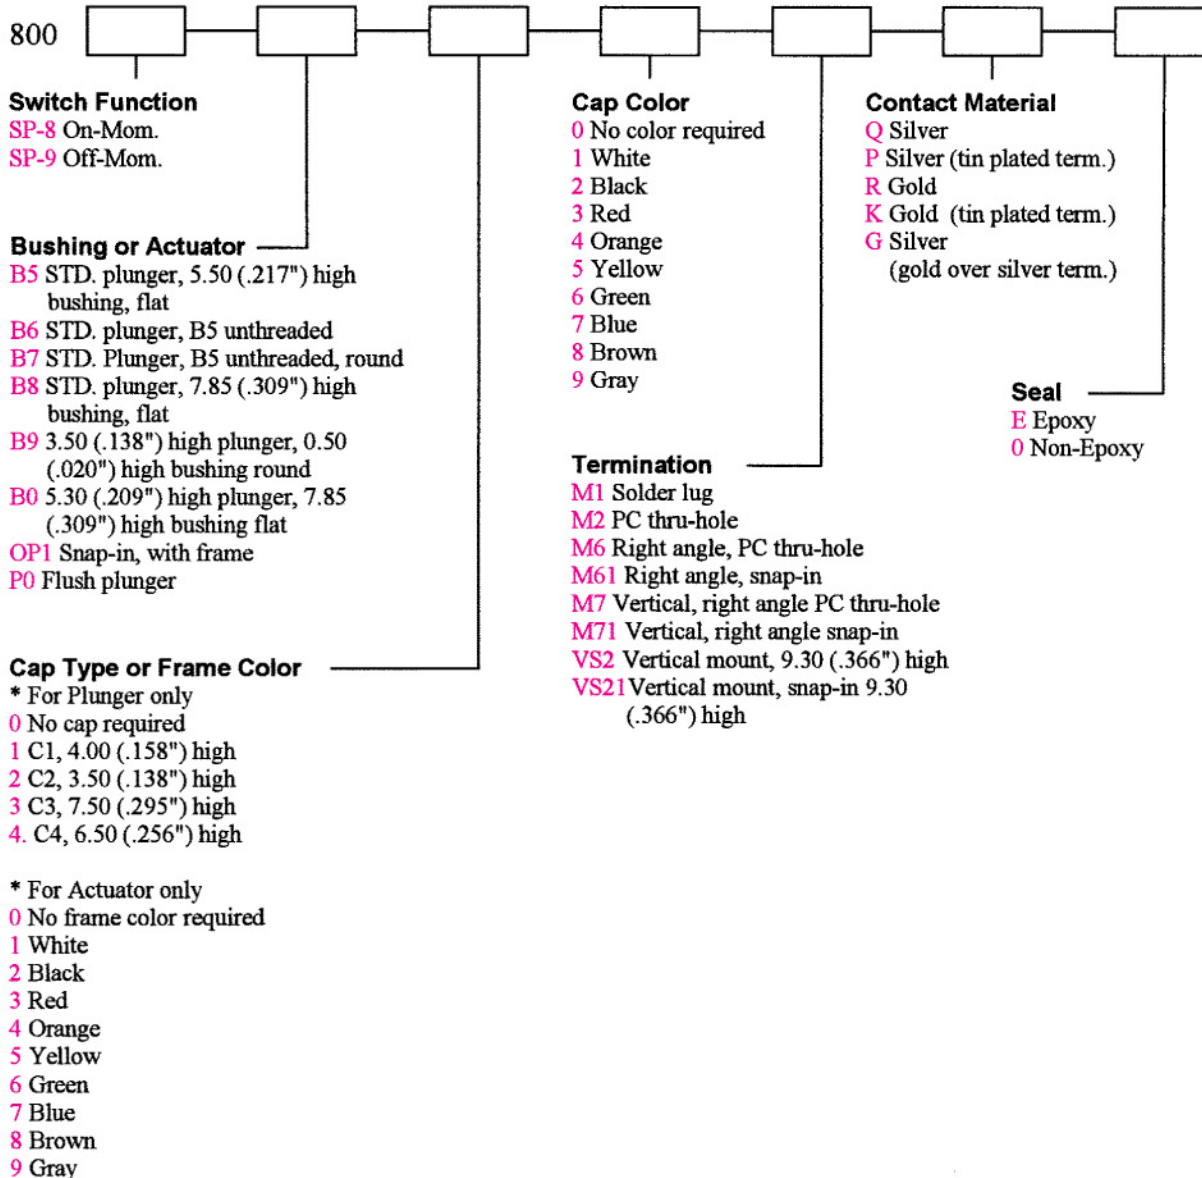

Specifications and Dimensions subject to change