
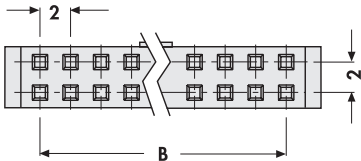
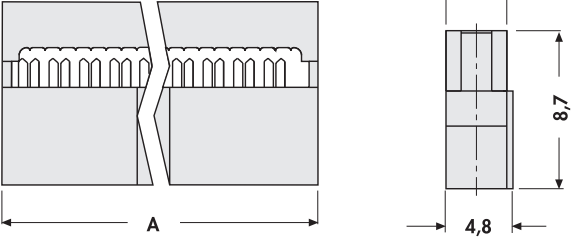


Female connector

Two rows

			
art. no.	no. of contacts	dim. [mm]	
		A	B
PVY 20 S	20	25.10	18.00
PVY 40 S	40	45.30	38.00
PVY 44 S	44	49.30	42.00
PVY 50 S	50	55.10	48.00

contact surface finish: selective gold-plated

H 11

Male headers .079" solder
 Female headers .079" solder
 Male headers .079" SMD
 Female headers .079" SMD

→ G 52 - 54
 → G 55
 → G 56 - 58
 → G 59

Application tools
 Boltable female header
 Technical data
 Female header two rows

→ H 13
 → H 5
 → H 14
 → H 4