

Lithium Li-MnO₂

3.0V




- Ability to operate from -40 °C to +70 °C
- Superior pulse capability
- High capacity at high current
- Safety vents, fuses
- No voltage delay

• Cylindrical

• Prismatic

• Button

• Soft

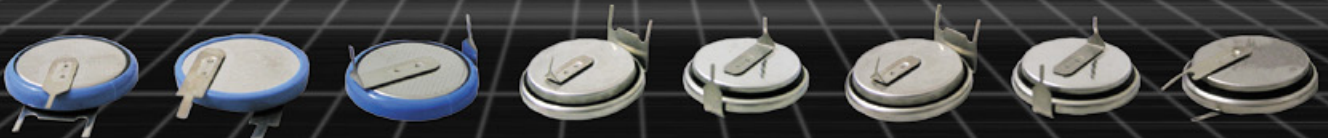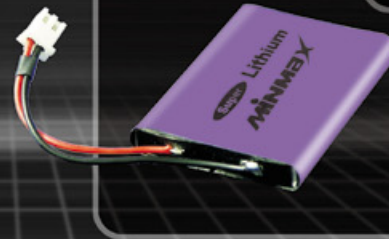

APPLICATIONS:

- Automotive Electronics
- Automotive Tire Pressure Monitoring Systems
- Wireless Sensors
- Asset / Animal Tracking
- Medical Devices
- Remote Monitoring

