


Lithium Li-SOCL₂

3.6V

- High current pulses
- Ability to operate from -60°C to +85°C
- Non-flammable electrolyte
- Hermetic glass-to-metal seal
- Low magnetic signature

• Cylindrical • Prismatic • Button • 9V

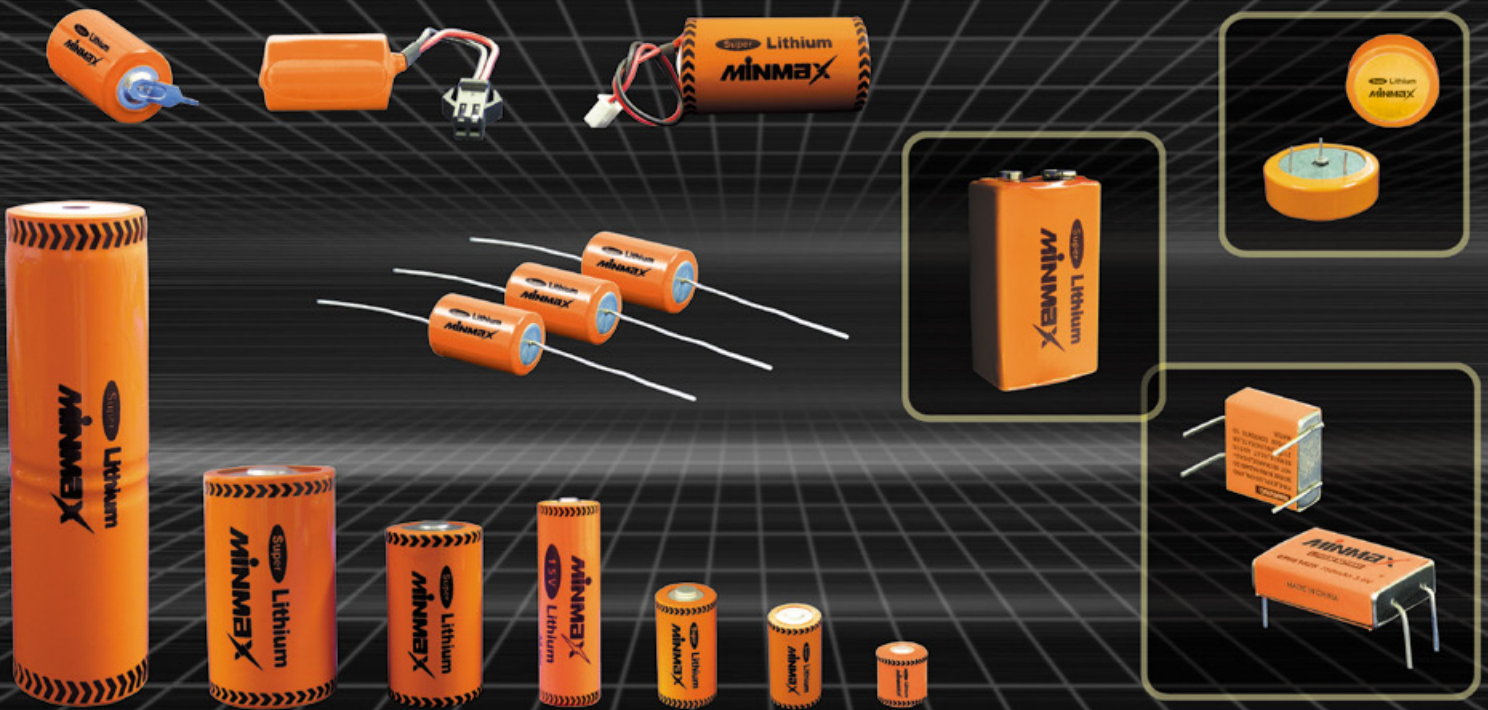

APPLICATIONS:

- Electronic Toll Collection
- GPS Emergency Locators / Roadside Assistance
- Wireless Security Systems (Pir)
- Security / Emergency
- Utilities and Metering
- Deep Hole Drilling
- Oceanographic / Sonobuoys

