




RECOMMENDED PANEL CUTOUT



SPECIFICATION

MATERIAL

Insulator: Thermal Plastic UL94V-D
 Contacts: Copper Alloy
 Shell: Steel
 Rivet,Boardlock: Copper Alloy

CONTACT PLATING

Underplate: 50u"~150u" Nickel
 Contact Area: 1u" Gold
 Solder Tail Area: 100u" Tin Min.

ELECTRICAL


Current Rating: 1A Max.
 Contact Resistance: 30 mΩ Max.
 Insulation Resistance: 3000 MΩ Min. @500V DC
 Dielectric Withstanding Voltage: 500V AC/minute
 Temperature Range: -55°C to +105°C

PART NO.

703 A F 050 F S C C A 3
 1 2 3 4 5 6 7 8 9 10

- 1.SERIES NO.
- 2.TYPE: A=Standard
- 3.GREEN OPTION:
F=RoHS
- 4.CONTACT NUMBER
050
- 5.CONTACT TYPE:
F=Female
- 6.CONTACT AREA PLATING:
S=Selective Gold 1u"
- 7.SHELL OPTION:
G=Front Shell

- 8.PROCESS OPTION:
A=Boardlock
C=Boardlock Loose Screws
- 9.PARTS OPTION:
A=2#56 W/ Hook
E=2#56 W/O Hook
- 10.INSULATOR COLOR:
3=Black

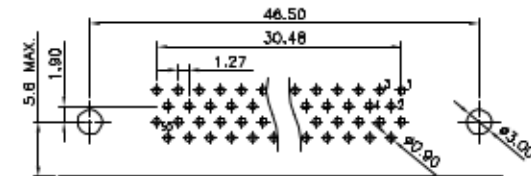

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±5°	
Ø.	±0.5	
.0	±0.3	
.00	±0.2	
SCALE: AS SHOWN	UNIT: mm	
DRAWN	11/01/14	DRAWN NAME: SCSI II PIN TYPE PCB RIGHT ANGLE TYPE
CHECKED	/ /	PRODUCT NO. 703AF050FSCA3
APPROVED	/ /	FILE NAME: 703AF050FSCA3
REV.	DESCRIPTION	DATE
		SIZE A4 REV. X1