


SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-D
 Contacts: Copper Alloy
 Shell: Steel
 Rivet,Boardlock: Copper Alloy
CONTACT PLATING
 Underplate: 50u"~150u" Nickel
 Contact Area: 1u" Gold
 Solder Tails Area: 200u" Tin Min.
ELECTRICAL
 Operation Voltage: 250V AC Max.
 Current Rating: 1A Max.
 Contact Resistance: 45 mΩ Max.
 Insulation Resistance: 500 MΩ Min. @500V DC
 Dielectric Withstanding Voltage: 500V AC/minute
 Temperature Range: -55°C to +105°C

PART NO.
 706 A E Q50 E S A A L 3
 1 2 3 4 5 6 7 8 9 10

- 1.SERIES NO.
- 2.TYPE: A=Standard
- 3.GREEN OPTION: F=RoHS
- 4.CONTACT NUMBER: 020 D26 036 050
- 5.CONTACT TYPE: F=Female
- 6.CONTACT AREA PLATING: S=Selective Gold 1u"
- 7.SHELL OPTION: A=Standard Type(Ni Plated)
- 8.PROCESS OPTION: A=Boardlock
- 9.PARTS OPTION: L=M2.6 W/ Hook
- 10.INSULATOR COLOR: 3=Black

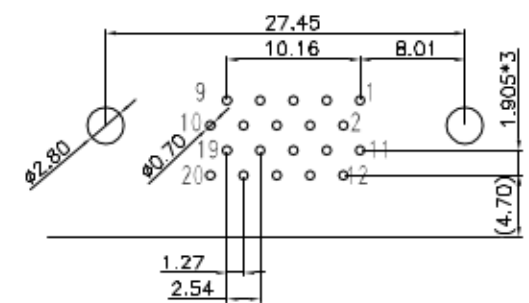

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±5°	
Ø.	±0.5	
.0	±0.3	
.00	±0.2	
SCALE: AS SHOWN	UNIT: mm	
DRAWN	11/01/14	DRAWN NAME: SCSI II RIBBON TYPE PCB RIGHT ANGLE TYPE
CHECKED	/ /	PRODUCT NO. 706AF050FSAAL3
APPROVED	/ /	FILE NAME: 706AF050FSAAL3
REV.	DESCRIPTION	DATE
		SIZE A4 REV. X1