


SPECIFICATION
MATERIAL
 Insulator: Thermoplastic, rated UL94-HB
ELECTRICAL
 Operation voltage: 5.0 V
 Current rating: 0.5 Amps max.
 Contact resistance: 80 mohms initial
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC / minute
 Temperature range: -0°C TO +60°C

Part no. G A 02 B D C0 00 X B0
 1 2 3 4 5 6 7 8 9

- 1.SERIES NO.
G=Finished
- 2.A=Adapter
- 3.02=USB C Plug/USB 3.0 AF
- 4.B=TYPE B
- 5.GREEN OPTION:
D=RoHs2(matte)(Halogn-Free)

- 6.CUSTOMER NO:
C0=coxoc
- 7.Technology Code:
00=W/O logo
01=W/logo
- 8.A=TRAY
D=Bag
- 9.COLOR: B0=Black

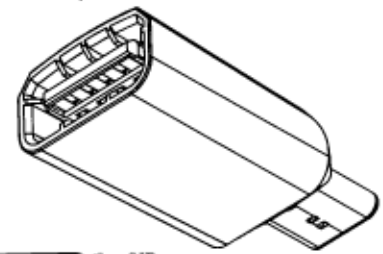

For SIP
 (ST) For CmK/Cpk

| | |
|--------------------------------------|--------|
| UNLESS OTHERWISE SPECIFIED TOLERANCE | |
| ANG. | ± 2° |
| 0. | ± 0.50 |
| .0 | ± 0.30 |
| .00 | ± 0.20 |

SCALE: AS SHOWN UNIT: mm

DRAWN: PEARL 10/05/2015

CHECKED: 林永盛

APPROVED: 范改敏 10/05/2015

DATE: 10/05/2015

DRAWN NAME: USB C Plug to A(Legacy) Adapter (ID-B)

PRODUCT NO. C-GA02BDC000XB0

FILE NAME: C-GA02BDC000XB0(GB)

| | | | | | | |
|------|------------------------------|------------|------|----|------|---|
| REV. | DESCRIPTION | DATE | SIZE | A4 | REV. | A |
| A | ECN-1510005(Sam) X2 Change A | 10/05/2015 | | | | |